O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty

THREADED ROD - *Electralloy®* (GR.8)

36" LENGTHS
FOR HIGH TENSILE AND HIGH PRESSURE

- Meets or exceeds (ASTM) Specification A 193-B7
- Use where extra stength, extra length bolts or studs are required
- Special alloy steel for greater resistance to snapping, stripping and stretching
- Precision rolled threads

SIZE	PART No.	HEAVY ULTRALLOY® NUTS	
3/8-16	11116	11366	BA
1/2-13	11118	11367	BA
5/8-11	11119	11369	B
3/4-10	11120	11370	B
7/8-9	80008	40294	B
1"-8	11121	11371	B

- National Fine Available upon request

- Hundreds of uses as supports, brackets, U-bolts, extensions, eye bolts, braces, toggle bolts, hangers

© 1992 O.E.M. HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty™

THREADED ROD - *Electroplate* ®

36" LENGTHS

- Precision rolled threads for finest fit
- Greater resistance to shearing
- Quality controlled for easy forming and bending

SIZE	PART No.	
10-24	92025	BA
1/4-20	11105	
5/16-18	11106	
3/8-16	11107	
7/16-14	11108	
1/2-13	11109	B
5/8-11	11110	
3/4-10	11111	
7/8-9	92030	
1"-8	11112	

- National Fine Available upon request

COUPLING NUTS

FOR JOINING LENGTHS OF THREADED ROD

SIZE	PART No.	OUTSIDE HEX SIZE	LENGTH	
10-24	31000	5/16	3/4	FA
1/4-20	31001	7/14	7/8	
5/16-18	31002	1/2	1-3/4	CF
3/8-16	31003	9/16	1-3/4	
7/16-14	31004	5/8	1-3/4	
1/2-13	31005	3/4	1-3/4	
5/8-11	31006	15/16	2-1/8	BF
3/4-10	31007	1-1/8	1-1/4	
7/8-9	31008	1-1/4	2-1/2	BA
1"-8	31009	1-1/4	2-1/2	



© 1994 OEM HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty

GREASE FITTINGS-Ball Check Type

1/4-28, Straight
Thread Length: 9/64"
Overall Length: 1/2"
Ball Check
Plated

641(FA)

1/4-28, Straight
Thread Length: 7/32"
Overall Length: 9/16"
Ball Check
Plated

9257(FA)

1/4-28, Straight
Overall Length: 1/2"
Ball Check
Plated

652(FA)

1/4-28, Straight
Overall Length: 15/16"
Ball Check
Plated

9259(CF)

1/4-28, Straight
Self Tapping
Overall Length: 9/16"
Ball Check
Nominal Hole size 6mm
Plated

15000(CF)

1/4 Drive fit, Straight
Overall Length: 1"
Ball Check
Plated

15054(CF)

1/4" Drive fit, Straight
Overall Length: 27/64"
No check valve
Plated

15065(FA)



1/4-28, Straight
Thread Length: 9/64"
Overall Length: 1/2"
Ball Check
Plated

636(CF)

1/4-28, Straight
Thread Length: 9/64"
Overall Length: 1/2"
Ball Check
Plated

637(CF)



1/4-28, 65°
Overall Length: 25/32"
Ball Check
Plated

15053(CF)



1/4-28, 90°
Overall Length: 45/64"
Ball Check
Plated

911(CF)



1/4-28, 90°
Thread Length: 51/64"
Overall Length: 51/64"
Ball Check
Plated

15064(CF)

1/8" Pipe, St.
Overall Length:
5/8"
Ball Check
Plated

610(FA)



1/8" Pipe, St.
Overall Length:
1-1/4"
Ball Check
Plated

9267(CF)



1/8" Pipe, St.
Overall Length:
1-3/4"
Ball Check
Plated

15063(BA)

1/8" Pipe, St.
Self Tapping
Overall Length:
39/64"
Ball Check
Nominal hole
size: 3/8"
Plated

15066(CF)

1/8" Pipe, 30°
Overall Length:
1-3/32"
Ball Check
Plated

611(CF)

1/8" Pipe, 45°
Overall Length: 1"
Ball Check
Plated

688(CF)

1/8" Pipe, 65°
Overall Length:
7/8"
Ball Check
Plated

612(CF)



1/8" Pipe, 90°
Overall Length:
53/64"
Ball Check
Plated

614(CF)

SUPPLIES

© 1992 O.E.M. HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty

GREASE FITTINGS-Ball Check Type

3/16" Drive fit, Straight Overall Length: 1/2" Ball Check Plated **15060(FA)**	5/16-24", Straight Overall Length: 5/8" Ball Check Plated **711(CF)**	5/16" Drive fit, Straight Overall Length: 9/16" Ball Check Plated **15061(FA)**
3/8-24", Straight Overall Length: 5/8" Ball Check Plated **710(CF)**	 1/4" Pipe, Straight Overall Length: 27/32" Ball Check Plated **627(CF)**	1/4" Pipe 65° Overall Length: 1" Ball Check Plated **629(BA)**
6mm-1.00, Straight DIN 71412 (VW:N185151) Overall Length: 14mm Ball Check Plated **8701(F)**	6mm-1.00, 45° Overall Length: 22mm Ball Check Plated **7045(BA)**	6mm-1.00, 90° Overall Length: 18mm Ball Check Plated **7090(BA)**
8mm-1.00, Straight DIN 71412 (VW;N185161) Overall Length: 15mm Ball Check Plated **11098(F)**	8mm-1.00, 45° Overall Length: 23mm Ball Check Plated **11777(BA)**	8mm-1.00, 90° DIN 71412 (VW;N185112) Overall Length: 18mm Ball Check Plated **11099(F)**
8mm-1.25, Straight Overall Length: 15mm Ball Check Plated **11778(BA)**	8mm-1.25, 45° Overall Length: 23mm Ball Check Plated **11779(BA)**	8mm-1.25, 90° Overall Length: 18mm Ball Check Plated **11780(BA)**
10mm-1.00, Straight DIN 71412 (VW;N185301) Overall Length: 15mm Ball Check Plated **11100(F)**	10mm-1.00, 45° Overall Length: 23mm Ball Check Plated **15067(CF)**	10mm-1.00, 90° DIN 71412 (VW;N185101) Overall Length: 19mm Ball Check Plated **11101(F)**

© 1992 O.E.M. HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

RUBBER VACUUM CAPS

- Special Heat Resistance Material
- Can be used for capping lines and hoses while testing carburetors, emission control systems, vacuum lines etc.

FITS TUBE O.D.	INSIDE LGTH	O.E.M. #	PART No.	
1/8"	9/16"	Ford: 380615-S, 387466-S	794-150	CF
3/16"	9/16"	Ford: 380614-S	794-152	CF
1/4"	9/16"	Ford: 380613-S, GM: 547944	794-154	CF
3/8"	31/32"	Ford: 385353-S, GM: 14008227	794-156	CF
5/16"	1-1/4"	Ford: 389129-S	794-158	CF

VINYL

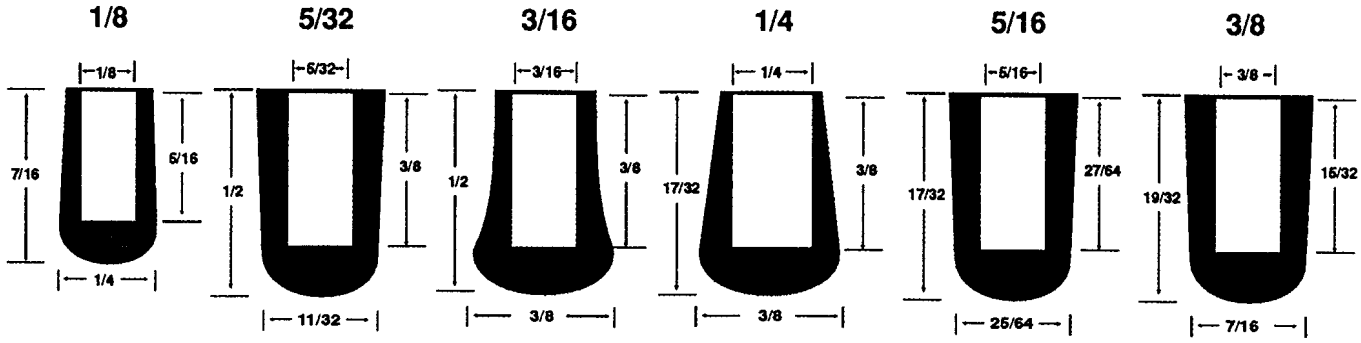

600048	600050	600052	600054	600056	600055
CF	CF	CF	CF	CF	CF

- Fits 14 to 16 Guage Material

PLUG BUTTONS-BLACK POLYETHYLENE			
HOLE SIZE	HEAD DIA	PART No.	
3/8	23/32	701-175	BAA
1/2"	7/8"	701-176	
5/8	3/16"	701-178	
3/4"	1-1/8"	701-179	
7/8"	1-1/4	701-180	
1"	1-7/16	701-181	
1-1/4"	1-5/8	701-182	FA

PLUG BUTTONS-NICKEL PLATED				
HOLE SIZE	HEAD DIA	WORKING THICKNESS	PART No.	
1/4"	13/32"	.035"-.062"	3750	FA
3/8"	1/2"	.037"-.078"	3751	
7/16"	21/32"	.037"-.047"	8013	
1/2"	21/32"	.037"-.062"	3752	
5/8"	13/16"	.062"-.078"	3753	
3/4"	15/16"	.037"-.093"	3754	
7/8"	1-1/16"	.031"-.093"	3755	
1"	1-1/8"	.062"-.093"	3756	

© 1996 OEM HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty

HOSE CLAMPS-Worm Gear Type

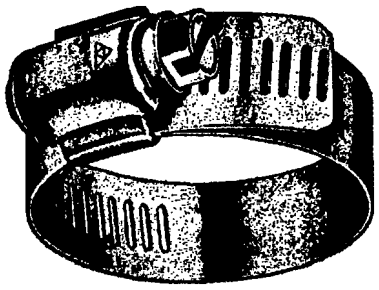

HEX SLOTTED SCREW
—WORM GEAR TYPE—HOSE CLAMPS
PARTIAL STAINLESS STEEL
STAINLESS STEEL BAND AND SADDLE
PLATED SCREW AND HOUSING

IND. STD. SIZE	PART No.	CLAMP RANGE MIN-MAX	HOSE I.D. 3/16" WALL	FITS PLASTIC PIPE SIZE	
6	28910		1/4 to 3/8	3/8	BA
8	28915	1/2 - 29/32	5/16 to 1/2	1/2	BA
10	63872	9/16 - 1-1/16	3/8 to 5/8	1/2 TO 3/4	BA
12	63942	9/16 - 1-1/4	5/8 to 3/4	1/2 TO 3/4	BA
16	64047	11/16 - 1-1/2	3/4 to 1"	3/4 TO 1"	BA
20	64012	13/16 - 1-3/4	1" TO 1-1/4	1" TO 1-1/4	BA
24	28920	1-1/16 - 2	1-1/4 TO 1-1/2	1" TO 1-1/2	BA
28	64107	1-5/16 - 2-1/4	1-1/4 TO 1-3/4	1-1/4 TO 1-1/2	BA
32	28925	1-9/16 - 2-1/2	1-1/2 TO 2"	1-1/2 TO 2"	BA
36	64112	1-13/16 - 2-3/4	1-3/4 TO 2-1/2	1-1/2 TO 2"	BA
40	28930	2-1/16 - 3	2" TO 2-1/2	2" TO 2-1/2	BA
48	64117	2-9/16 - 3-1/2	2-1/2 TO 3"	2-5/8 TO 3	BA

62057
(BAA)

Mini Clamp:
For: Small Hose application
Stainless Steel Band
w/Double Plated Hex Head
Steel Screw
Band Width 5/16"
Minimum Range 1/4"
Maximum Range 5/8"

63858
(BAA)

Mini Clamp:
For: Small Hose application
Stainless Steel Band
w/Double Plated Slotted
Head Steel Screw
Band Width 5/16"
Minimum Range 1/2"
Maximum Range 7/8"

HOSE CLAMP ASSORTMENT

Hose Clamp Rack. Ten-post rack allows easy access to adjustable hose clamps from the smallest mini-clamp up to the 2-1/2" diameter #36 clamp. May be countertop or wall-mounted; two built-in hanger loops provided. Sign panel list clamp diameters

SUPER-FIX
ASSORTMENTS

PART No. 8860

RACK ONLY
2418316



© 1992 O.E.M. HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

O-CLAMPS

SIZE	PART No.	
HC9-2 / 1/8	794-018	CF
HC9-2-3/4 / 11/64	794-020	
HCP-9 / 3/16	794-022	
HCP-9 /1/4	794-024	
HC9-5 / 5/16	794-026	
HCP-6 / 3/8	794-028	
HC9-7 / 7/16	794-030	
HC9-8 / 1/2	794-032	
HC9-9 / 9/16	794-034	
HC9-91/2 / 19/32	794-036	
HC9-10 / 5/8	794-038	
HC9-12 / 3/4	794-040	
HC9-13 / 13/16	794-042	
HC9-14 / 7/8	794-044	
HC9-15 / 15/16	794-046	
HC9-16 / 1"	794-048	



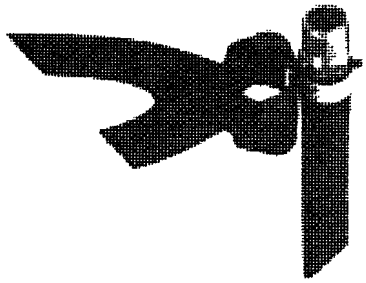

FAR SUPERIOR CLAMPING FORCE

- INSTALLS IN SECONDS
- SAFE AND RELIABLE

GREAT ON ALL KINDS OF RUBBER HOSE—PLASTIC TUBING—COAXIAL AND ELECTRICAL CABLE—ALSO UNLIMITED USES WITH AIR, FLUIDS AND GAS

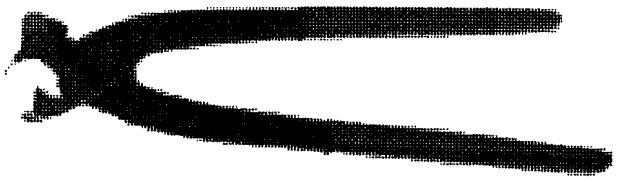

749-050 REG TOOL (B)

749-052 SIDE JAW TOOL (B)

SPRING ACTION HOSE CLAMPS



Part No	Hose O.D.	Colour	Max Dia Clamp in free position	Width	
12682	3/8"	Black	.321	5/16"	BAA
12683	7/16"	Green	.405	5/16"	
12684	1/2"	Red	.460	5/16"	
12685	9/16"	Black	.520	5/16"	
12686	5/8"	Olive	.583	5/16"	
12688	11/16"	Red	.655	5/16"	
12689	3/4"	Black	.645	3/8"	
12690	15/16"	Olive	.860	3/8"	FA
12691	1"	Black	.910	3/8"	

SUPPLIES

© 1996 OEM HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

SHIMS



3155 (BAA)
1-1/4" X 1-1/8" X 1/16" Thick
3/8" Slot-Plated



3156 (BAA)
1-1/4" X 1-1/8" X 1/8" Thick
3/8" Slot-Plated



2452 (BAA)
1-3/4" X 1-1/4" X 1/16" Thick
1/2" Slot-Plated

2453 (BAA)
1-3/4" X 1-1/4" X 1/8" Thick
1/2" Slot-Plated

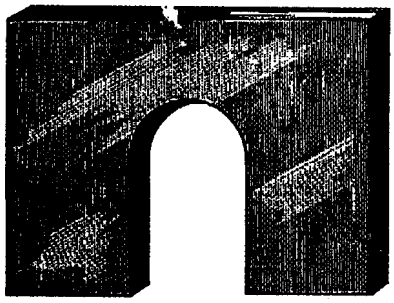

2999 (BAA)
2" X 1-1/2" X 1/8" Thick
5/8" Slot-Plated

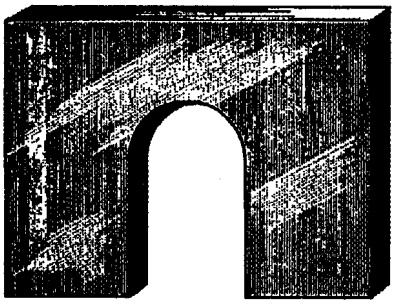

3000 (BAA)
2" x 1-1/2" x 1/8 Thick
3/4" Slot-Plated

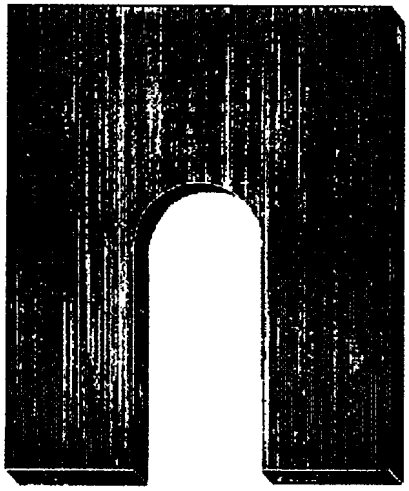

3158 (BAA)
2" x 2-1/2" x 1/16 Thick
3/4" Slot-Plated



8445 (BAA)
1/8" or 10 Guage Steel
1/2" Slot-Plated

UNIVERSAL ALIGNMENT SHIMS
PLATED

NO.	THICKNESS	
11186	1/64"	CF
11187	1/32"	CF
11188	1/16"	CF
11189	1/8"	CF



© 1992 O.E.M. HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

CASTER AND CAMBER SHIMS



NO.	THICKNESS	
5074	1/64"	FA
5075	1/32"	FA
5076	1/16"	FA
5077	1/8"	FA

Caster and Camber and Ball Joints Shims:
Comet, Ford, Mercury



NO.	THICKNESS	
5079	1/64"	FA
5081	1/32"	FA

Caster and Camber Shims:
Cadillac, Oldsmobile. Lincoln, Willys



NO.	THICKNESS	
5089	1/32"	FA
5090	1/16"	FA
5091	1/8"	FA

Caster and Camber Shims:
Buick, Chevrolet

Caster and Camber and Ball Joints Shims:
Oldmobile

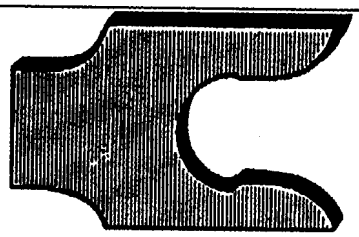

NO.	THICKNESS	
5093	1/32"	FA
5094	1/16"	FA
5095	1/8"	FA

Caster and Camber Shims:
Buick, Pontiac, Tempest (Front & Rear)

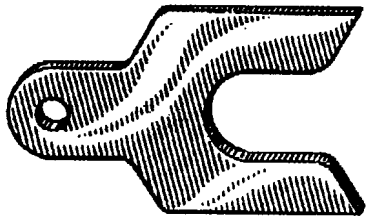

NO.	THICKNESS	
5096	1/32"	FA
5097	1/16"	FA
5098	1/8"	FA
5099	3/16"	FA

Caster and Camber Shims:
Light Chevrolet and GM Trucks

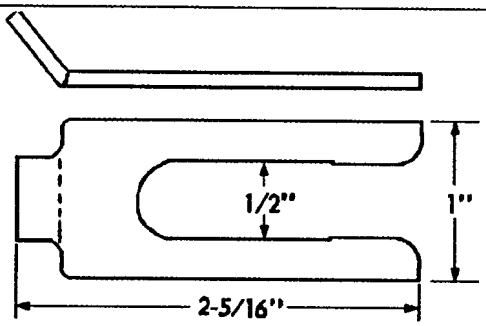

NO.	THICKNESS	
10705	1/16"	CF
10706	1/8"	CF

Body Whim Used in Aligning Fenders, Doors.
Trunks & Hoods: Pontiac

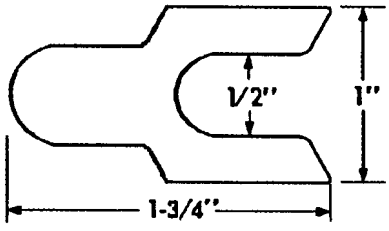

NO.	THICKNESS	
10707	1/32"	CF
10708	1/16"	CF
10709	1/8"	CF

BALL JOINT SHIM-PLATED

SUPPLIES

© 1992 O.E.M. HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

SUPER-FIX ASSORTMENTS
Standard Rubber
8015

"O"-RINGS

SUPER-FIX ASSORTMENTS
Air Conditioning (Nitrile)
700-004

SUPER-FIX ASSORTMENTS
Air Conditioning (Neoprene)
16732

INSIDE DIA.	OUTSIDE DIA.	THICKNESS	STANDARD RUBBER*	Air Condition Neoprene (Freon)	Air Condition Nitrile (R134A)	Ref. No	
1/8	1/4	1/16	793-006				FA
5/32	9/32		793-007				
3/16	5/16		793-008				
7/32	11/32		793-009				
1/4	3/8		793-010	16324			
5/16	7/16		793-011	16325			
3/8	1/2		793-012	16326			
7/16	9/16		793-013	16327			
1/2	5/8		793-014	16328			
9/16	11/16		793-015	16330			
5/8	3/4		793-016	16332			
11/16	13/16		793-017	16333			
3/4"	7/8"		793-018	16334			
3/8	9/16	3/32	793-110				FA
7/16	5/8		793-111				
1/2	11/16		793-112	16329			
9/16	3/4		793-113	16331			
5/8	13/16		793-114				
11/16	7/8		793-115				
3/4	15/16		793-116				
7/8	1-1/16		793-118	16336			
15/16	1-1/8		793-119	16337			
1-3/16	1-3/8		793-123	16338			
1-1/4	1-7/16		793-124	16339			
3/4	1"	1/8	793-210				FA
13/16	1-1/16		793-211	16335			
7/8	1-1/8		793-212				
15/16	1-3/16		793-213				
1"	1-1/4		793-214				
1-1/16	1-5/16		793-215				CF
1-1/8	1-3/8		793-216				
1-3/16	1-7/16		793-217				
1-1/4	1-1/2		793-218				
1-5/16	1-9/16		793-219				
1-3/8	1-5/8		793-220				
1-7/16	1-11/16		793-221				
1-1/2	1-3/4		793-222				
1-5/8	1-7/8		793-223				
1-3/4	2"		793-224				
1-7/8	2-1/8		793-225				
.290	.432	.071			17604	Ford: 391396	CF
.400	.546	.073			17605	Ford: 391397	
.509	.655	.073			17606	Ford: 391304	
.617	.769	.076			17607	Ford: 391305	BF
4.5mm	7.3mm	1.4mm			18134	Niss: 92472-N8200	CF
6mm	9.6mm	1.8mm			18135	Niss: 92470-N8200	
6.5mm	9.5mm	1.5mm			18136	Toyota: 90099-14044	
6.6mm	10.2mm	1.8mm			18137	Acura: 80873-ST7-000	
7.7mm	11.3mm	1.8mm			18138	Niss:92474-N8200	
10.7mm	15.5mm	2.4mm			18140	Acura: 80872-ST7-000	
10.8mm	14.4mm	1.8mm			18139	Niss:92471-N8200	
13.3mm	18.1mm	2.4mm			18141	Acura: 80871-ST7-000	
13.4mm	17.2mm	1.9mm			18143	Toyota:90099-14045	BF
14mm	17.6mm	1.8mm			18142	Niss:92473-N8200	CF
14.8mm	19.6mm	2.4mm			18144	Niss:92475-W2100	BF

* All Standard Rubber sizes are available by number/size eg. order 793-226 for a standard rubber #226

© 1994 OEM HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty

SLOTTED SPRING PINS

SUPER-FIX ASSORTMENTS 8020

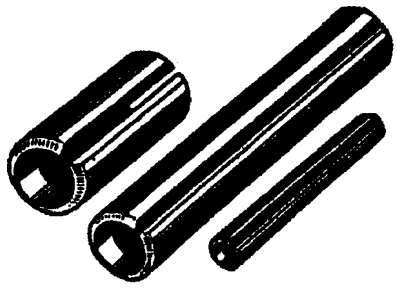

DIA.	LENGTH	PART No.	
1/16	X 1/4	533690	FA
	X 3/8	533691	
	X 1/2	533692	
	X 3/4	533693	
	X 1	533694	
5/64	X 1/4	533695	
	X 1/2	533696	
	X 3/4	533697	
	X 1	533698	
3/32	X 1/4	533699	
	X 5/16	533700	
	X 1/2	533701	
	X 3/4	533702	
	X 1	533703	
1/8	X 3/8	533704	
	X 1/2	533705	
	X 3/4	533706	
	X 1	533707	
	X 1-1/4	533708	
	X 1-1/2	533709	
	X 2	533710	
5/32	X 1/2	533711	
	X 3/4	533712	
	X 1	533713	
	X 1-1/4	533714	
	X 1-1/2	533715	

DIA.	LENGTH	PART No.	
3/16	X 1/2	533716	FA
	X 3/4	533717	
	X 1	533718	
	X 1-1/4	533719	
	X 1-1/2	533720	
	X 2	533721	
7/32	X 3/4	533722	
	X 1	533723	
	X 1-1/4	533724	
1/4	X 1/2	533725	
	X 3/4	533726	
	X 1	533727	
	X 1-1/4	533728	
	X 1-1/2	533729	
	X 1-3/4	533730	CF
	X 2	533731	
	X 2-1/2	533732	
5/16	X 3/4	533733	
	X 1	533734	
	X 1-1/4	533735	
	X 1-1/2	533736	
	X 1-3/4	533737	
	X 2	533738	
	X 2-1/2	533739	
3/8	X 1	533740	
	X 1-1/4	533741	
	X 1-1/2	533742	
	X 1-3/4	533743	
	X 2	533744	
	X 2-1/2	533745	

© 1992 O.E.M. HARDWARE
DIV OF STOCKTON INDUSTRIES INC.
1-800-663-6554

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty™

ULTRA HAMMER LOCK COTTER PINS

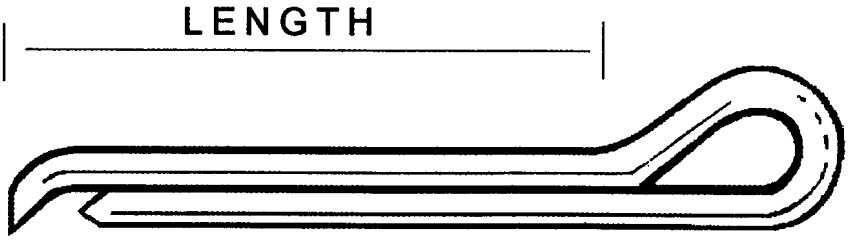

THE ULTRA HAMMERLOCK COTTER PIN IS PRECISION MADE TO PROVIDE FAST, EASY INSTALLATION.

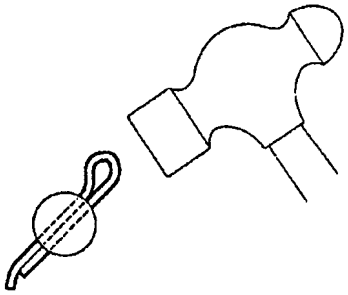

- EASY TO INSERT AND LOCK
- EASY TO REMOVE AND REUSE
- A BLOW WITH A HAMMER LOCKS THE PIN IN PLACE
- SHANKS PARALLEL AND POINTS TAPPERED FOR EASY INSTALLATION

AUTOMATICALLY LOCKS FROM ONE HAMMER BLOW

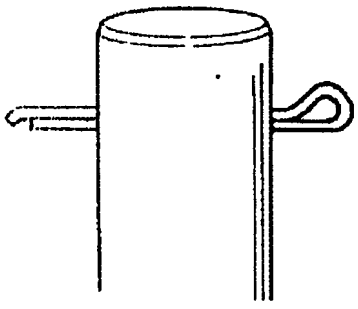

Insert as you would any ordinary cotter pin. Cotter pins have specially tapered parallel shanks for quick insertion.

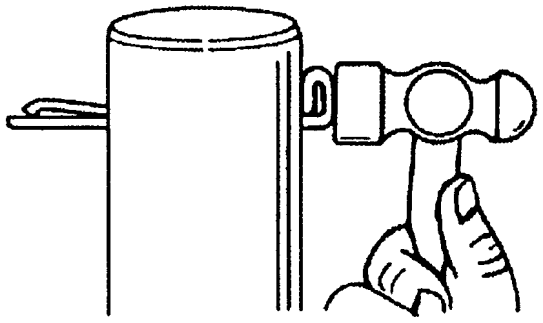

Shanks Spread and Lock Themselves

When hammer hits head of cotter pin, it forces shorter shank down over the curved end of longer shanks, thus causing lower ends of shank to spread apart. This one simple operation locks pin securely in place. No twisting or spreading of shanks is necessary. It's all done automatically.

1-800-663-6554

© 1996 OEM HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty

ULTRA HAMMER LOCK COTTER PINS

PART NO	DIAMETER	LENGTH	
92033	1/16	1/2	CFA/BCF
92035		3/4	
92036		1	
92037	3/32	1/2	
92038		3/4	
92039		1	
92040		1-1/4	
92041		1-1/2	
92042		2	
797-040	7/64	3/4	
797-041		1	
92046	1/8	1/2	
92047		3/4	
92048		1	
92049		1-1/4	
92050		1-1/2	
92051		1-3/4	
92052		2	
92053		2-1/2	
92054	5/32	3/4	
92055		1	
92056		1-1/4	
92057		1-1/2	BAA/FA
92058		1-3/4	
92059		2	
92060		2-1/2	
92061	3/16	1	
92062		1-1/2	
92063		2	
92064		2-1/2	
92065	1/4	1	
92066		1-1/2	
92067		2	
92068		2-1/2	
92069		3	
92070	5/16	1	
92071		2	
92072		3	

SEE OUR COST SAVINGS

SUPER-FIX ASSORTMENTS

7750

© 1992 O.E.M. HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

INTERNAL TYPE RETAINING RINGS

HOUSING DIAMETER	3/8	7/16	1/2	5/8	3/4
RING DIAMETER	.415	.482	.548	.694	.831
RING THICKNESS	.025	.025	.035	.035	.035
PART No.	533931 (BA)	533932 (BA)	533933 (BA)	533934 (BA)	533935 (BA)

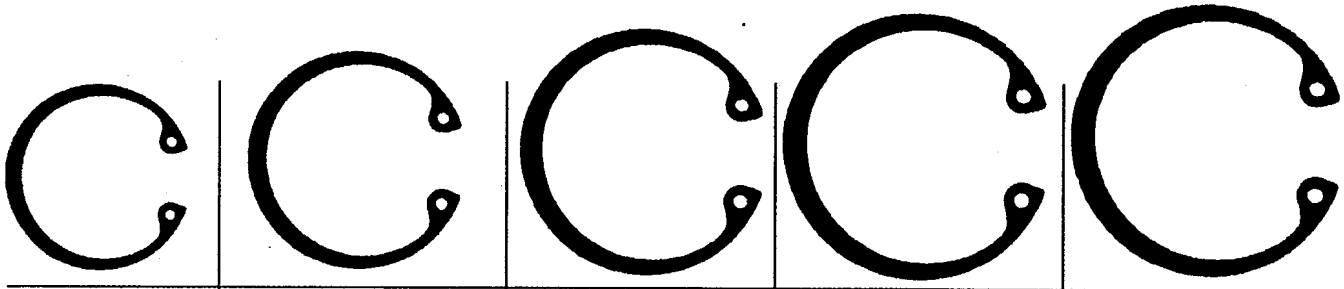

7/8	1"	1-1/16	1-1/4	1-3/8
.971	1.081	1.150	1.351	1.486
.042	.042	.042	.050	.050
533936 (CA)	533937 (CA)	533938 (CA)	533939 (CA)	533940 (CA)

SUPER-FIX *ASSORTMENTS* 8036

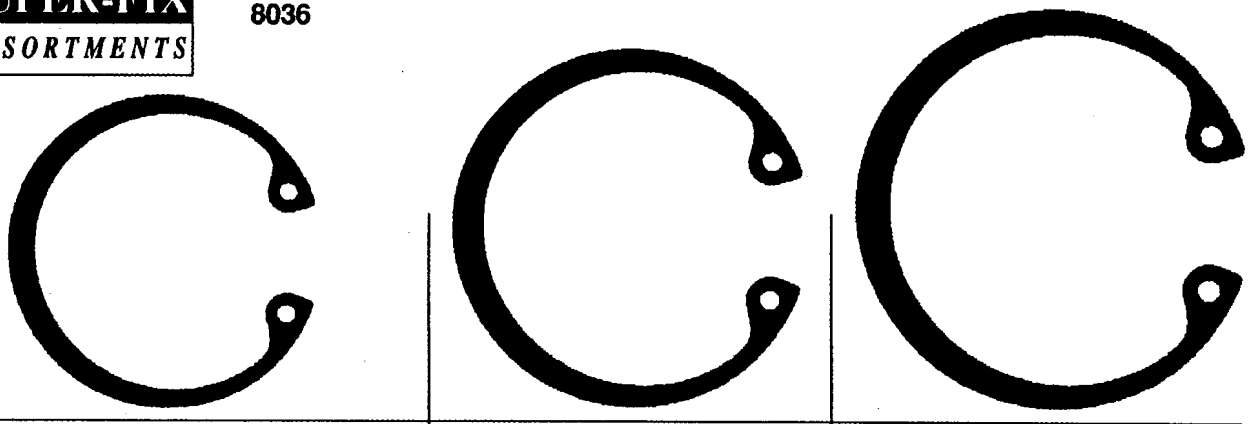

1-1/2	1-3/4	2"
1.660	1.942	2.210
.050	.062	.050
533943 (CA)	533942 (CA)	533943 (CA)

© 1992 O.E.M. HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

EXTERNAL TYPE RETAINING RINGS

SUPER-FIX ASSORTMENTS



SHAFT DIAMETER	1/4	5/16	3/8	7/16	1/2	5/8
RING DIAMETER	.225	.281	.338	.395	.461	.579
RING THICKNESS	.025	.025	.025	.025	.035	.035
PART No.	533945 (CF)	533946 (CF)	533947 (CF)	533948 (CF)	533949 (CF)	533950 (CF)

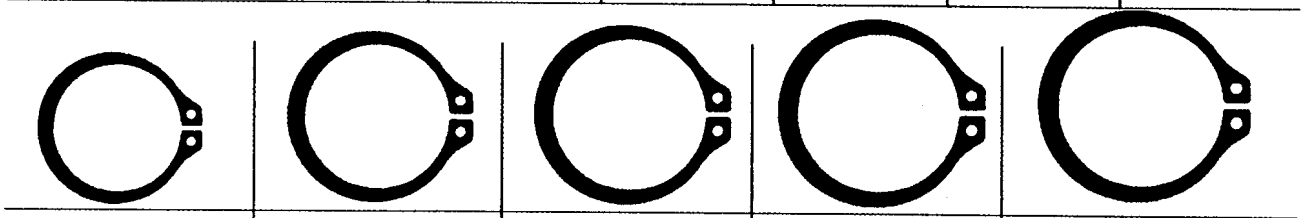

11/16	3/4	25/32	13/16	27/32
.635	.693	.722	.751	.780
.042	.042	.042	.042	.042
533951 (CF)	533952 (CF)	533953 (CF)	533954 (CF)	533955 (CF)

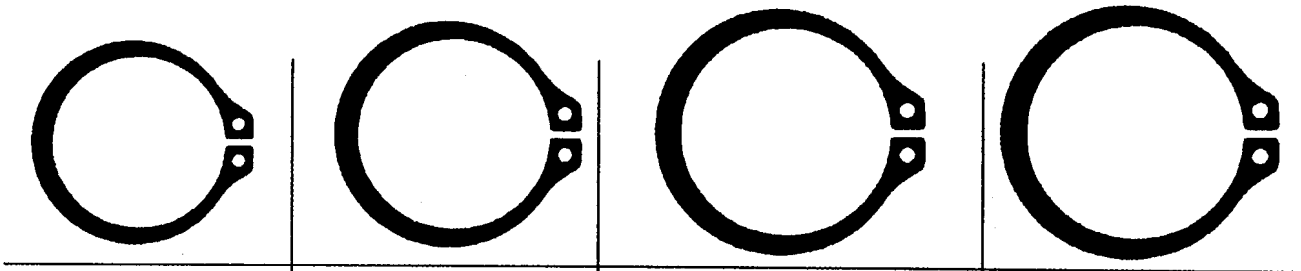

7/8	1"	1-1/8	1-3/16
.810	.825	1.041	1.098
.042	.042	.050	.050
533956 (CF)	533957 (CF)	533958 (CF)	533959 (CF)

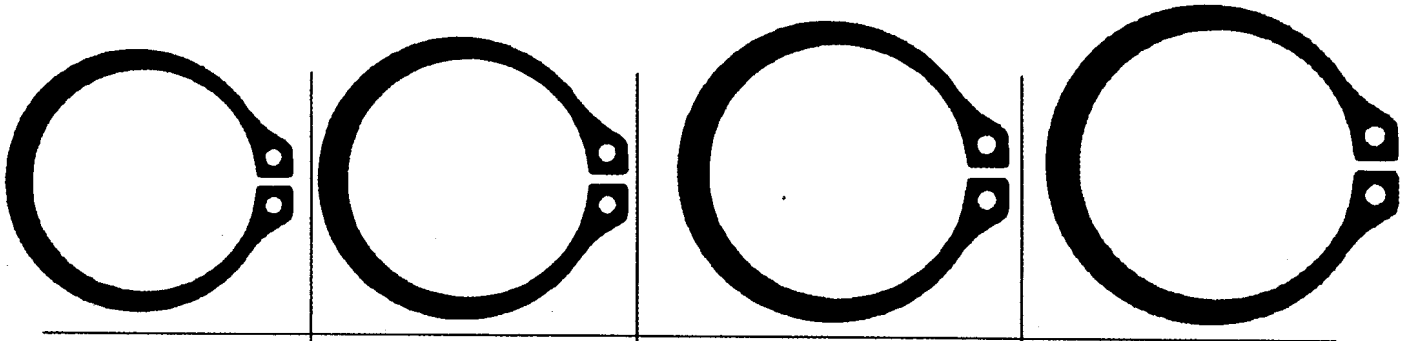

1-1/4 533960 (CF)	1-3/8 533961 (CF)	1-1/2 533962 (CF)	1-5/8 (533963 CF)
1.156	1.272	1.382	1.503
.050	.050	.050	.062

SUPPLIES

© 1992 O.E.M. HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty

"E" TYPE RETAINING RINGS

SUPER-FIX ASSORTMENTS 7749

SHAFT DIAMETER	1/8	5/32	3/16	7/32	1/4
RING DIAMETER	.094	.114	.145	.185	.207
RING THICKNESS	.015	.025	.025	.025	.025
PART No.	533965 (CA)	533966 (CA)	533967 (CA)	533968 (CA)	533969 (CA)

	5/16	3/8	7/16	1/2	5/8
	.243	.300	.337	.392	.480
	.015	.035	.035	.042	.042
	533970 (CA)	533971 (CA)	533972 (CA)	533973 (CA)	533974 (CA)

		
3/4	7/8	1"
.574	.668	.822
.50	.50	.50
533975 (CA)	533976 (CA)	533977 (CA)

© 1992 O.E.M. HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

WOODRUFF KEYS

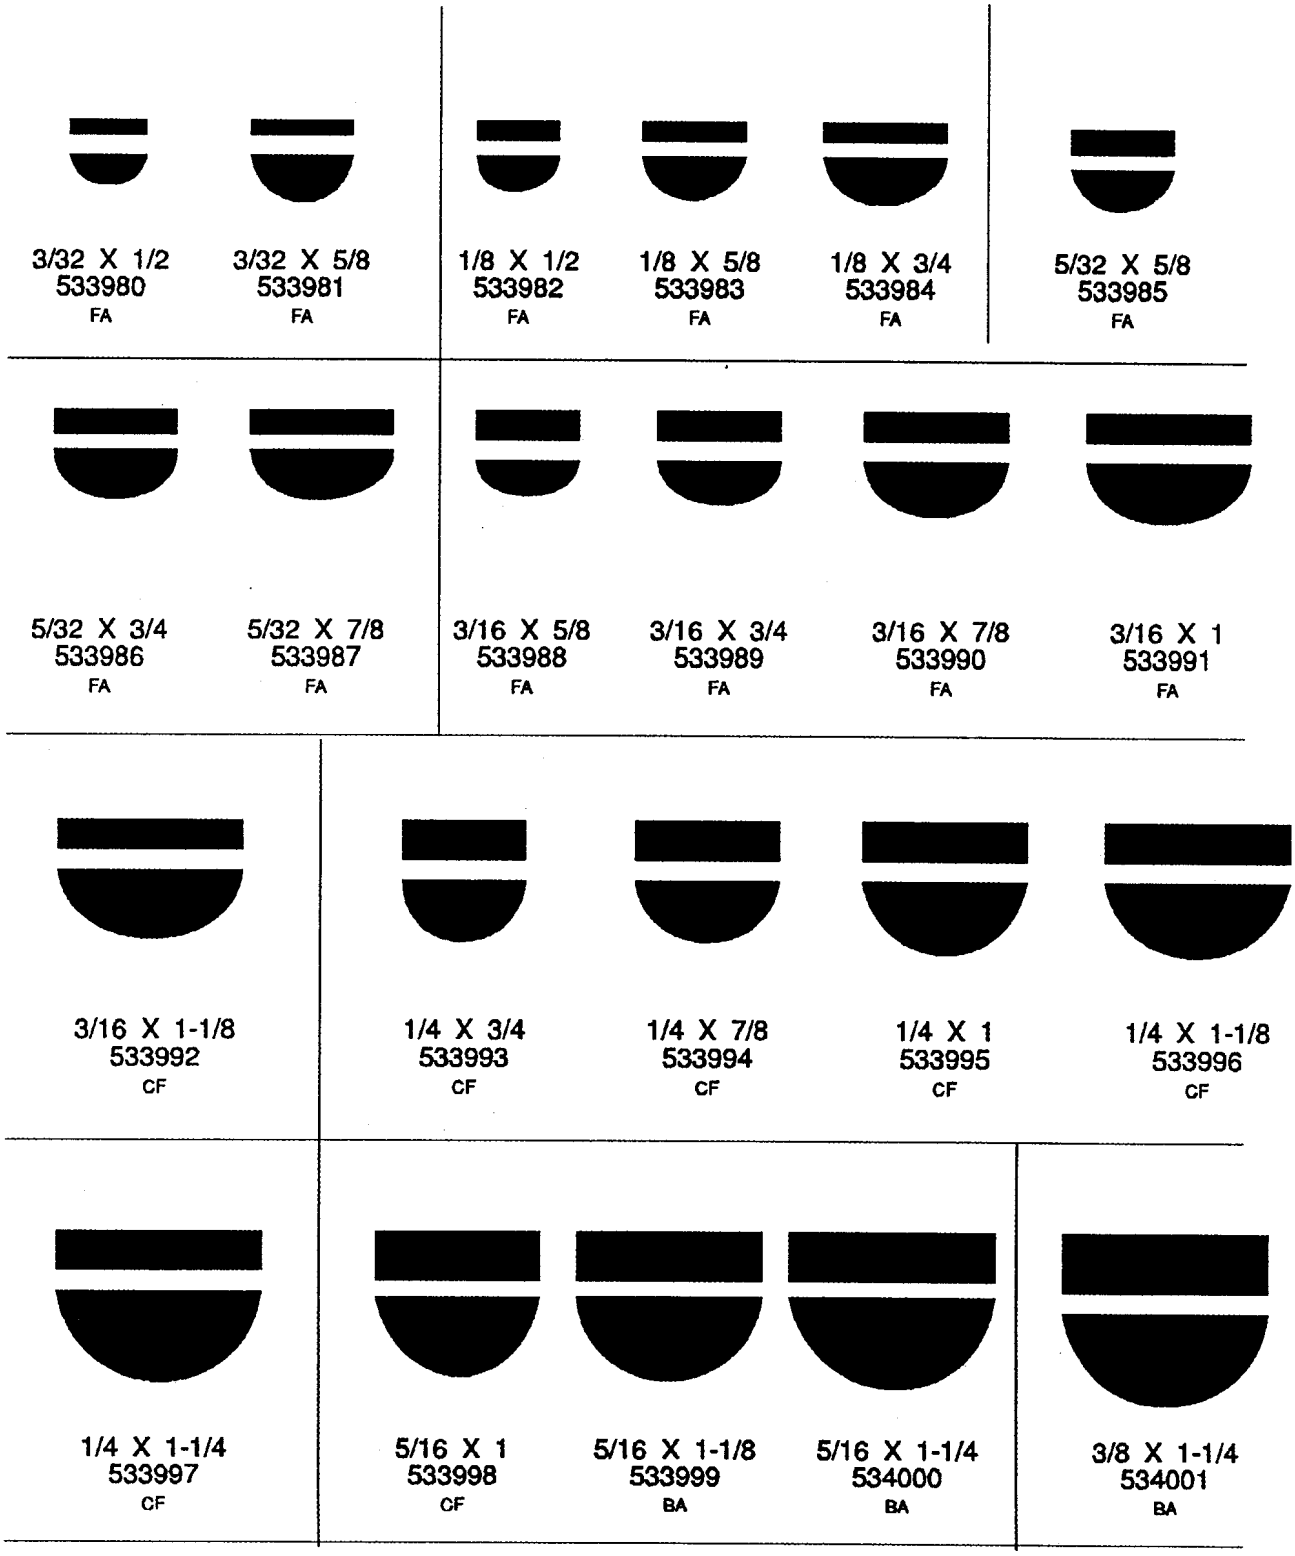

3/32 X 1/2 533980 FA	3/32 X 5/8 533981 FA	1/8 X 1/2 533982 FA	1/8 X 5/8 533983 FA	1/8 X 3/4 533984 FA	5/32 X 5/8 533985 FA
5/32 X 3/4 533986 FA	5/32 X 7/8 533987 FA	3/16 X 5/8 533988 FA	3/16 X 3/4 533989 FA	3/16 X 7/8 533990 FA	3/16 X 1 533991 FA
3/16 X 1-1/8 533992 CF	1/4 X 3/4 533993 CF	1/4 X 7/8 533994 CF	1/4 X 1 533995 CF	1/4 X 1-1/8 533996 CF	
1/4 X 1-1/4 533997 CF	5/16 X 1 533998 CF	5/16 X 1-1/8 533999 BA	5/16 X 1-1/4 534000 BA	3/8 X 1-1/4 534001 BA	

SUPER-FIX ASSORTMENTS

8039

SUPPLIES

© 1992 O.E.M. HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty

HAIRPIN RETAINERS

SUPER-FIX ASSORTMENTS 8038

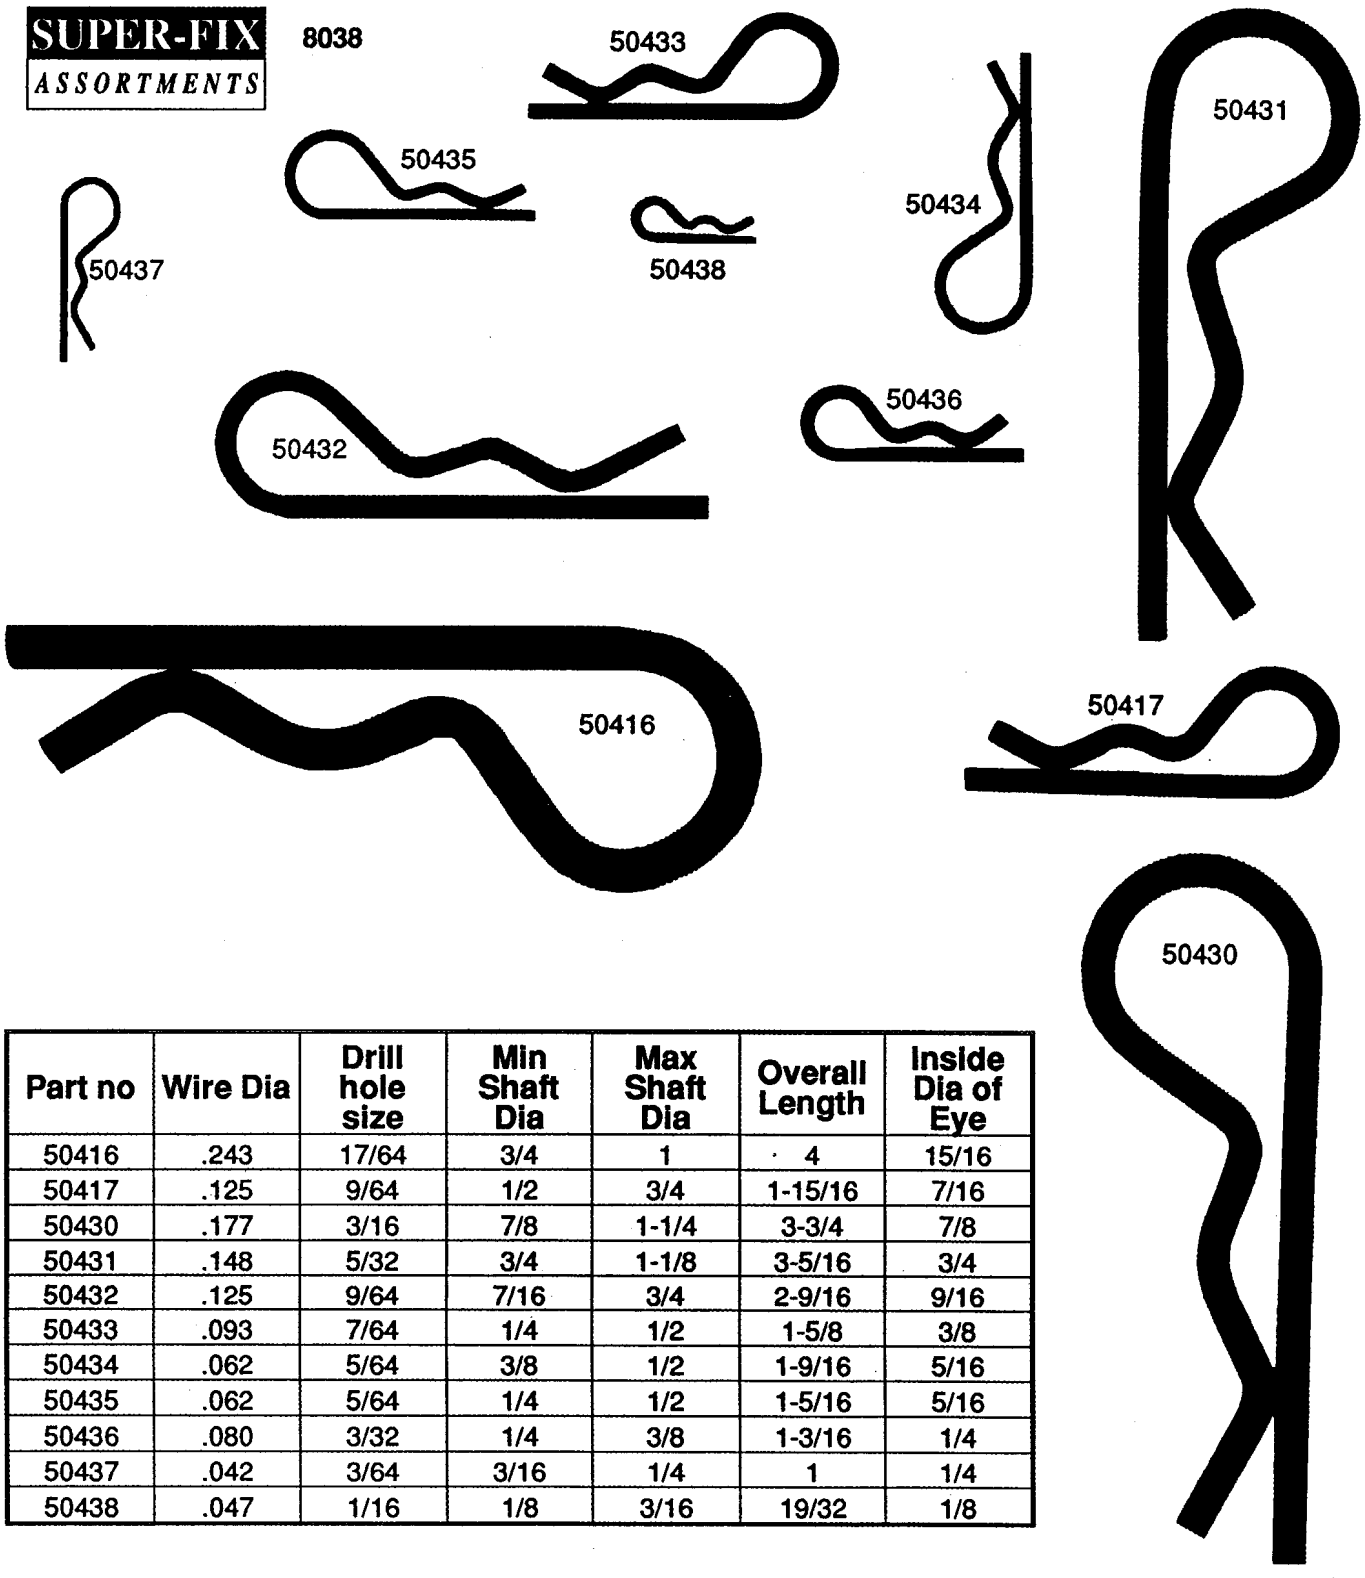

Part no	Wire Dia	Drill hole size	Min Shaft Dia	Max Shaft Dia	Overall Length	Inside Dia of Eye
50416	.243	17/64	3/4	1	4	15/16
50417	.125	9/64	1/2	3/4	1-15/16	7/16
50430	.177	3/16	7/8	1-1/4	3-3/4	7/8
50431	.148	5/32	3/4	1-1/8	3-5/16	3/4
50432	.125	9/64	7/16	3/4	2-9/16	9/16
50433	.093	7/64	1/4	1/2	1-5/8	3/8
50434	.062	5/64	3/8	1/2	1-9/16	5/16
50435	.062	5/64	1/4	1/2	1-5/16	5/16
50436	.080	3/32	1/4	3/8	1-3/16	1/4
50437	.042	3/64	3/16	1/4	1	1/4
50438	.047	1/16	1/8	3/16	19/32	1/8

© 1992 O.E.M. HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty™

UNIVERSAL CLEVIS PINS

SUPER-FIX ASSORTMENTS 8038

DIAMETER	GRIP	PART NO	
1/4	5/8" TO 2"	533925	G
5/16		533926	G
3/8		533927	G
7/16		522928	G
1/2		533929	G
5/8		533930	G

SUPPLIES

© 1994 OEM HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty

UNIVERSAL SPRINGS



14097

14098

14099



14101

14102

14103

14104

PART No.		OVERALL LENGTH	COIL LENGTH	O.D.	WIRE SIZE
14097	BA	11-1/2"	1-7/8"	13/32"	1/32"
14098	BA	4-3/8"	2-1/2"	1/2"	1/16"
14099	BA	1-13/16"	1-1/2"	3/8"	1/32"
14100	BA	8-1/2"	1-7/8"	3/4"	3/32"
14101	BA	5-3/4"	2-3/8"	25/32"	3/64"
14102	BA	18-1/2"	2"	13/16"	3/32"
14103	BA	17-1/2"	3-1/2"	3/4"	1/16"
14104	BA	8-1/4"	2"	7/16"	1/16"

© 1992 O.E.M. HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty

EXTENSION SPRINGS

PART No.		TYPE	LENGTH OVERALL	COIL OVERALL	O.D.	WIRE SIZE	lbs. Rate/Inch	APPROX. Lbs. Load @ Reference Ext.
14057	F	1	10"	9.000"	.625"	.072"	2.1	8.8 @ 13"
14058	F	1	10"	9.250"	.500"	.062"	1.8	10.2 @ 12"
14059	F	2	6.438"	5.575"	.438"	.048"	1.1	4.2 @ 8.437"
14060	F	1	6.500"	5.925"	.328"	.035"	7.5oz	2.2 @ 8.500"
14061	F	3	5.625"	4.975"	.547"	.080"	10.0	24 @ 7.625"
14062	F	1	5.750"	5.375"	.250"	.028"	7 oz	1.6 @ 7.750"
14063	F	4	3.250"	2.750"	.375"	.041"	1.9	5.2 @ 5.250
14064	F	1	4.000"	3.450"	.250"	.028"	13 oz	1.9 @ 6.00"
14065	F	1	4.500"	3.575"	.484"	.063"	6.2	14 @ 6.500"
14066	F	1	4.062"	2.750"	.734"	.062"	1.4	4.3 @ 6.062"
14067	F	5	4.000"	2.825"	.719"	.105"	12.5	36.5 @ 5.00"
14068	F	6	5.250"	3.000	.531"	.062"	5.0	8.5 @ 6.250"
14069	F	5	2.594"	1.500"	.750"	.105"	46	29.5 @ 2.968"
14070	F	5	2.656"	1.500"	.750"	.080"	10.3	12.5 @ 3.656"
14071	F	5	1.625"	.900"	.500"	.080"	64.0	23 @ 1.875"
14072	BA	1	1.438"	.825"	.344"	.048"	15.0	10 @ 1.812"
14073	BA	7	1.125"	.575"	.297"	.040"	3.8	1.6 @ .875"
14074	BA	1	1.125"	.700"	.234"	.020"	12.0	9oz @ 1.625"
14075	CA	8	1.000"	1.000"	.188"	.014"	3 oz	3oz @ 1.500"
14076	F	3	5.500"	4.800"	.562"	.080"	10.5	24.5 @ 7.00"

* BRASS

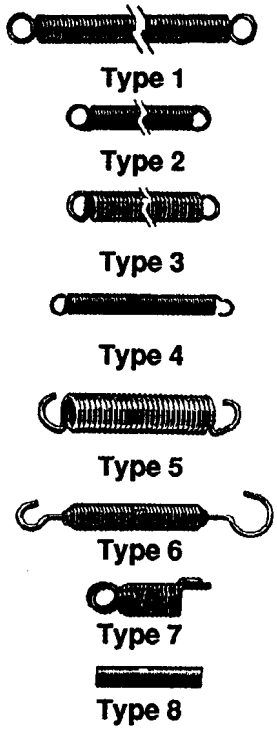

COMPRESSION SPRINGS

PART No.		LENGTH OVERALL	O.D.	WIRE SIZE	Approx. Solid Ht.	lbs. Rate/Inch
14077	F	10.00"	.875"	.080"	3.00"	3.2
14078	F	11.500"	.625"	.054"	3.564"	1.0
14079	BA	11.500"	.375"	.047"	4.240"	2.3
14080	BA	10.00"	.176"	.014"	2.254"	.500oz
14082	F	.069"	.500"	.072"	.612"	52.0
14083	F	2.562"	1.015"	.120"	1.148"	56.0
14084	F	2.031	.938"	.080"	.640"	16.0
14085	F	3.062"	.875"	.092"	1.098"	21.5
14086	F	2.00"	.875"	.120"	.964"	110.0
14087	F	4.062"	.688"	1.050"	1.952"	58.0
14088	F	2.844"	.625"	.080"	1.080"	30.0
14089	CA	2.193"	.590"	.040"	.380"	3.1
14090	CA	.500"	.281 X .156	.013"	.117"	14oz
14092	CA	1.969"	.312"	.022"	.528"	9oz
14093	CF	.983"	.188"	.012"	.240"	5oz
14094*	CA	.781"	.375"	.042"	.378"	7.4
14095	BA	2.625"	.438"	.048"	.950"	6.0
14096	BA	2.500"	.500"	.063"	1.00	18.0

* BRASS

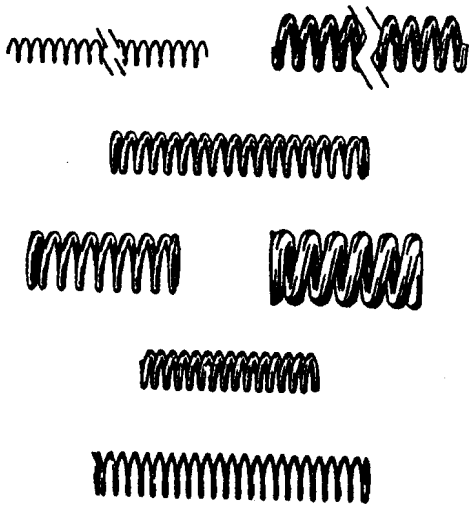

SUPPLIES

© 1992 O.E.M. HARDWARE
DIV OF STOCKTON INDUSTRIES INC.
1-800-663-6554

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty™

HAIR PIN COTTERS





PART No.	WIRE DIAMETER	INSIDE DIAMETER	OVERALL LENGTH	
9893	.035"	1/32"	3/8"	BAA
3168	.025"	1/16"	23/64"	CAA
3169	.025"	5/64"	13/32"	CAA
9890	.025"	3/32"	3/8"	BAA
3170	.025"	3/32"	13/32	CAA
3171	.025"	3/32"	1/2"	CAA
3172	.035"	7/64"	1/2"	CAA
9887	.035"	1/8"	5/16"	BAA
3173	.045"	1/8"	31/64"	CAA
9889	.025"	1/8"	9/16"	BAA
3174	.030"	9/64"	15/32"	CAA
3175	.025"	5/32"	31/64"	CAA
3176	.045"	5/32"	5/8"	CAA
2598	.060"	7/32"	3/4"	BAA
9891	.060"	9/32"	13/16"	BAA
9892	.060"	5/16"	1"	BAA
3177	.075"	3/8"	7/8"	CAA

THROTTLE ROD CLIPS

PART No.	SIZE			
3784	3/32"	RIGHT		BAA
3785	3/32"	LEFT		
3609	5/32"	RIGHT	RC2R	
3610	5/32"	LEFT	RC2L	
3611	3/16"	RIGHT	RC4R	
3612	3/16"	LEFT	RC4L	
3613	1/4"	RIGHT	RC7R	
3614	1/4"	LEFT	RC7L	
9919	1/4"	RIGHT		



LEFT HAND TYPE



RIGHT HAND TYPE

DRAIN PLUGS AND GASKETS

SUPER-FIX ASSORTMENTS 700-222

Drain plugs are manufactured in three styles:

- **STANDARD: Replacement for the original plug.**
- **OVERSIZE: (O.S.) Tapered and hardened. Cuts own thread where the original has been stripped.**
- **DOUBLE OVERSIZE: (D.O.) aslo Self-threading-larger than oversize.**
- **TRIPLE OVERSIZE: (T.O.) also Self-threading.**

To use an oversize plug, hold in a staight position and tighten with a socket wrench. Plug is then removed to clear out chips and then replaced.
Each Drain Plug is supplied with a nylon gasket.

DRAIN PLUG		NYLON GASKET		COPPER GASKET	
PART No.	SIZE & THREAD	PART No.	SIZE	PART No.	SIZE
51603	1/2-20 STD.	794-000	9/16 X 13/16	794-006	19/32 x 13/16
51604	1/2-20 O.S.	794-000	9/16 X 13/16	794-006	19/32 x 13/16
51605	1/2-20 D.O.	794-002	5/18 X 15/16	794-008	5/8 x 1
51606	1/2-20 T.O.	794-004	11/16 X 1	794-010	3/4 x 1-1/16
51607	5/8-18 STD.	794-004	11/16 X 1	794-010	3/4 x 1-1/16
51608	5/8-18 O.S.	794-004	11/16 X 1	794-010	3/4 x 1-1/16
(BC)		(CF)		(CF)	

© 1994 OEM HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

O.E.M HARDWARE

HARD TO FIND FASTENERS OUR SPECIALTY

TUMBLERS, SPRINGS & RETAINERS

Part No.	Briggs & Stratton No.	Illus. Type	Description	Pkg.
17704	46648	1	GM,Chrysler & AMC Tumbler Spring, 7/16" Long, 5/64" O.D.	100
17707	46890	1	Chrysler Double Bitted Tumbler Spring, 17/64" Long, 1/16" O.D.	100
17711	320126	2	Ford Tumbler Retainer, 7/32" Wide, 3/4" Long	10
17712	320169	3	Chrysler Pin Tumbler Retainer, 5/16" Wide, 1-1/16" Long	10
17713	320291	5	GM & Jeep Side Bar Tumbler #1, .025 Depth Charge	50
17714	320292	5	GM & Jeep Side Bar Tumbler #2, .025 Depth Charge	50
17715	320293	5	GM & Jeep Side Bar Tumbler #3, .025 Depth Charge	50
17716	320294	5	GM & Jeep Side Bar Tumbler #4, .025 Depth Charge	50
17717	320295	5	GM & Jeep Side Bar Tumbler #5, .025 Depth Charge	50
17733	320606	6	GM & H.D. Truck Snap-In Tumbler #1, .025 Depth Charge	100
17736	320666	6	GM & H.D. Truck Snap-In Tumbler #2, .025 Depth Charge	100
17737	320667	6	GM & H.D. Truck Snap-In Tumbler #3, .025 Depth Charge	100
17738	320668	6	GM & H.D. Truck Snap-In Tumbler #4, .025 Depth Charge	100
17739	320669	6	GM & H.D. Truck Snap-In Tumbler #5, .025 Depth Charge	100
17740	320690	8	GM & H.D. Turck Retainer Tumbler (Standard), .025 Depth Charge	50
17741	320698	9	GM & H.D. Truck Retainer Tumbler (Standard), .025 Depth Charge	50
17748	321127	4	GM Side Bar Tumbler Retainer, 7/32" Wide, 5/8" Long	100
17780	321761	7	Chrysler, Jeep & GM Saturn Double Bitted Tumbler #1	50
17781	321762	7	Chrysler, Jeep & GM Saturn Double Bitted Tumbler #2	50
17782	321763	7	Chrysler, Jeep & GM Saturn Double Bitted Tumbler #3	50
17783	321764	7	Chrysler, Jeep & GM Saturn Double Bitted Tumbler #4	50
18361	322521	10	GM Sidebar Ignition Tumbler, #1 Depth, 10 Cut	25
18362	322522	10	GM Sidebar Ignition Tumbler, #2 Depth, 10 Cut	25
18363	322523	10	GM Sidebar Ignition Tumbler, #3 Depth, 10 Cut	25
18364	322524	10	GM Sidebar Ignition Tumbler, #4 Depth, 10 Cut	25
18365	56028	1	GM Tumbler Spring, 10 Cut, Sidebar Ignition, 5/16" Long, 5/64" O.D.	25
18366	322117	12	GM Tumber Retainer, 10 Cut, Sidebar Ignition	25
18367	322241	11	GM Door & Deck Lock Cylinder Tumbler, #1 Depth, 10 Cut	25
18368	322242	11	GM Door & Deck Lock Cylinder Tumbler, #2 Depth, 10 Cut	25
18369	322243	11	GM Door & Deck Lock Cylinder Tumbler, #3 Depth, 10 Cut	25
18370	322244	11	GM Door & Deck Lock Cylinder Tumbler, #4 Depth, 10 Cut	25
18940	322361	13	Chrys./Jeep Wide Body Tumbler, #1 Depth, Double Bitted	25
18941	322362	13	Chrys./Jeep Wide Body Tumbler, #2 Depth, Double Bitted	25
18942	322363	13	Chrys./Jeep Wide Body Tumbler, #3 Depth, Double Bitted	25
18943	322364	13	Chrys./Jeep Wide Body Tumbler, #4 Depth, Double Bitted	25
18944	46994	1	Chrys./Jeep Tumbler Spring, 3/8" Long, 1/16" O.D.	25

© 2000 O.E.M. HARDWARE
DIV OF STOCKTON INDUSTRIES INC.
1-800-663-6554

CAPS, SHUTTERS & SPRINGS

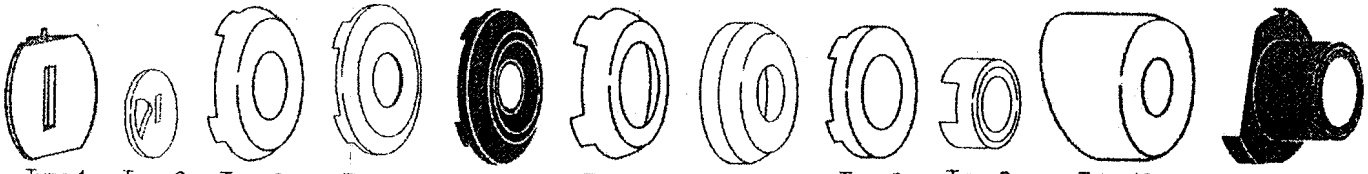

Type 1 Type 2 Type 3 Type 4 Type 5 Type 6 Type 7 Type 8 Type 9 Type 10 Type 11

Part No.	Briggs & Stratton No.	Illus. Type	Description	Pkg
17710	59885	1	GM & Jeep Shutter (Chrome)	25
17718	320395	3	GM Standard Cap (Chrome), 15/32" I.D., 1-1/8" O.D., 9/32" O.H.	10
17742	320725	10	Camaro/Firebird Cap (Chrome), 15/32" I.D., 1-1/8" O.D., 3/4" O.H.	1
17746	320969	6	GM Optic Cap (Chrome), 9/16" I.D., 1-1/8" O.D., 3/8" O.H.	5
17758	321504	7	Chrysler Door Lock Snap Cap (Chrome), 7/16" I.D., 1-1/16" O.D., 5/16" O.H.	10
17761	321531	11	GM Stove Top Cap (Black), 15/32" I.D., 13/16" O.D., 3/4" O.H.	5
17762	321561	3	GM Standard Cap (Black), 15/32", I.D., 1-1/8", O.D., 9/32" O.H.	5
17763	321563	6	GM Optic Cap (Black), 9/16" I.D., 1-1/8" O.D., 3/8" O.H.	5
17774	321710	5	Chry Deck/Tailgate Lock Cap (Lg Black), 7/16" I.D., 1-3/8" O.D., 5/16" O.H.	5
17784	321788	8	GM "C" Car Trunk Lock Cap (Chrome), 23/32" I.D., 1-1/8" O.D., 9/32" O.H.	5
17794	321847	4	Chry. Door & Cone Lock Cap (Chrome), 7/16" I.D., 1-1/16" O.D., 7/32" O.H.	5
17795	321848	4	Chry. Door & Cone Lock Cap (Black), 7/16" I.D., 1-1/16" O.D., 7/32" O.H.	5
17803	322144	9	GM Snap Cap (Chrome), 15/32" I.D., 13/16" O.D., 3/8" O.H.	5
17822	593986	1	GM & Jeep Shutter (Black)	5
17825	594190	2	Cadillac "Eyebrow" Shutter (Chrome)	5

O.H. - Overall Height

HARDWARE & ACCESSORIES

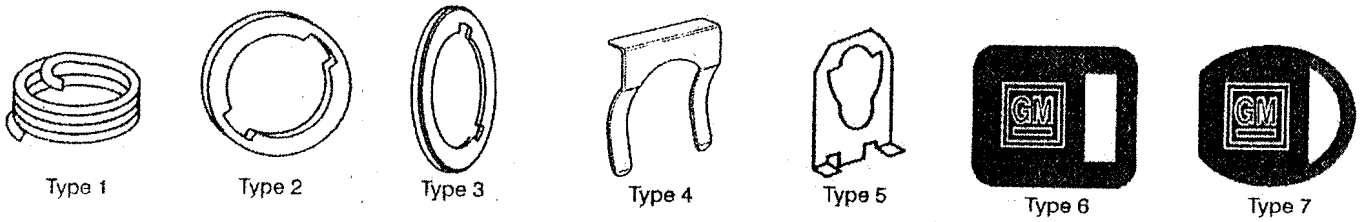

Type 1 Type 2 Type 3 Type 4 Type 5 Type 6 Type 7

Part No.	Briggs & Stratton No.		Description	Pkg.
17703	46399	1	GM Lock Cylinder Return Spring, 5/8" Coil I.D., 11/16" Coil O.D.	25
17708	47522	2	GM Door Lock Gasket, 1-5/8" O.D.	50
17709	47544	3	GM Deck Lock Gasket, 1-5/16" O.D.	50
17755	321480	4	Universal Lock Cylinder Retainer Clip	10
17759	321963	5	GM Pawl Retainer Clip	10
17805	380055	6	GM Rectangular Key Boot (Black)	25
17806	380060	7	GM Oval Key Boot (Black)	25
17807	380536	6	GM Rectangular Key Boot (Gray)	25
17808	380537	7	GM Oval Key Boot (Gray)	25
17811	380602	6	GM Rectangular Key Boot (Blue)	25
17812	380603	7	GM Oval Key Boot (Blue)	25

© 2000 O.E.M. HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty™

SPONGE WEATHERSTRIPS

Peel-bak Adhesive Neoprene Sponge Weatherstrip

A light-weight closed cell sponge material, Peel-bak is an easy to apply type of weatherstrip for auto and household use. May also be used on boats, refrigerators or any place a weatherproof, permanent seal is required. Simple to use - just peel back the liner tape and press into place. No cement or tacking required. Surface must be clean and dry.

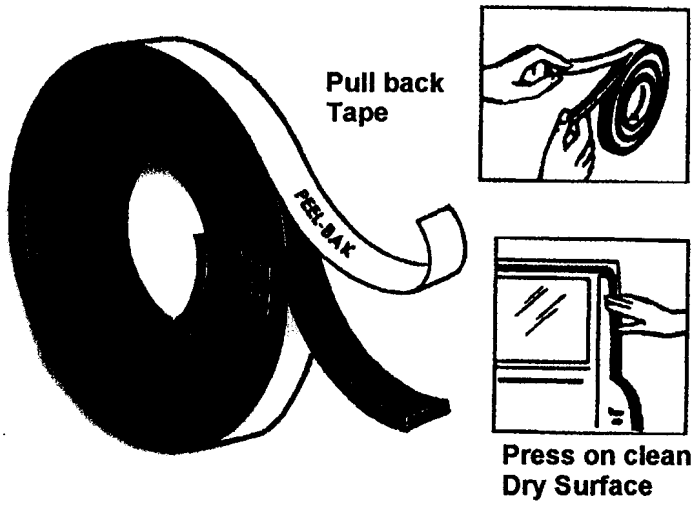

Thick-ness	Width	10 ft Roll	50 ft Roll
5/32"	3/8"	701-301	701-315
5/32"	1/2"	701-302	701-316
5/32"	5/8"	701-303	———
5/32"	3/4"	701-304	701-317
5/32"	1	701-305	701-318
5/16"	3/8"	701-306	701-319
5/16"	1/2"	701-307	701-320
5/16"	5/8"	701-308	———
5/16"	3/4"	701-309	701-321
5/16"	1"	701-310	701-322
7/16"	3/8"	701-311	701-323
7/16"	1/2"	701-312	701-324
7/16"	3/4"	701-313	701-325
7/16"	1"	701-314	701-326

Adhesive Vinyl Foam Sponge Weatherstrip

A medium density, closed cell, **vinyl foam** sponge weatherstrip with a permanent adhesive for easy application even on irregular and curved surfaces. Provides a seal against water, gases, light, dust, noise and can be used as a vibration dampener. Light gray in colour.

Meets: GM Specification #FBMS610 Type II
Ford Specification #ESBM 3G77A
Chrysler Specification #MSAY511-B

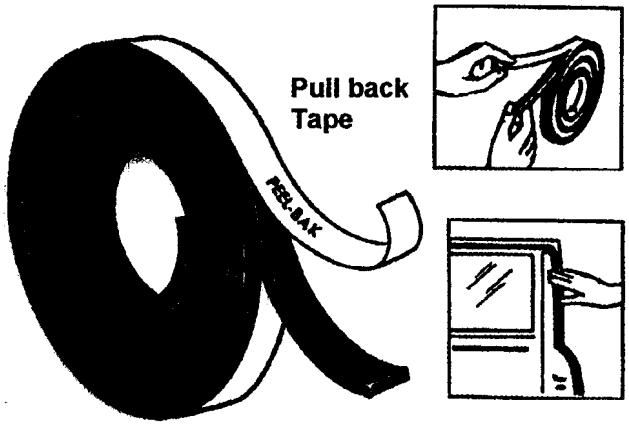

Thick-ness	Width	10 ft Roll	25 ft Roll
5/32"	3/8"	701-327	701-341
5/32"	1/2"	701-328	701-342
5/32"	5/8"	701-329	701-343
5/32"	3/4"	701-330	701-344
5/32"	1	701-331	701-345
5/16"	3/8"	701-332	701-346
5/16"	1/2"	701-333	701-347
5/16"	5/8"	701-334	701-348
5/16"	3/4"	701-335	701-349
5/16"	1"	701-336	701-350
7/16"	3/8"	701-337	701-351
7/16"	1/2"	701-338	701-352
7/16"	3/4"	701-339	701-353
7/16"	1"	701-340	701-354

Do Not use in contact with Oil, Gasoline, Petroleum Products, etc.

SUPPLIES

© 1992 OEM HARDWARE

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty™

VARI-TEMP TUBING

Vacuum Tubing

Meets or exceeds SAE J1037 Type 2 specifications.
withstands the abuse of
corrosive additives, heat, cold,
ozone, weather and abrasion

50 ft Rolls



Part No	I.D.	O.D.		
64001	7/64"	13/64"	Fits 1/8" Nipple	B
64002	5/32"	5/16"	Fits 3/16" Nipple	B
64003	7/32"	13/32"	Fits 1/4" Nipple	B

Fuel Line Hose

(not for Electronic Feul injection)
Meets the folowing O.E.M. specifications.
(GM:6165-M) (SAE J30R7) (Chrysler MSEA219)

50 ft Rolls



Part No	I.D.	O.D.	
65001	1/4"	1/2"	B
65002	5/16""	9/16"	B
65003	3/8"	5/8"	B

© 1994 OEM HARDWARE
DIV OF STOCKTON INDUSTRIES INC.

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty™

SUPER WRAP FUSION TAPE

SUPER WRAP "The tool box" IN A TOOL BOX

FUSES WITH ITSELF TO FORM A SOLID PIECE OF RUBBER AND SHRINKS TO MAKE A TOUGH WATER PROOF SEAL.

SUPERWRAP IS A **NON-ADHESIVE** *ADHESIVE, CONFORMS TO IRREGULAR SHAPES AND SIZES.*

USE IT FOR:

WET, OILY, DIRTY SURFACES

☞ **RADIATOR** ☞ **GARDEN HOSES**

☞ **LEAKY WATER PIPES** ☞ **ELECT. SPLICES**

☞ **WIRE HARNESS & WIRE LOOM**

☞ **PLUS MANY MORE APPLICATIONS**

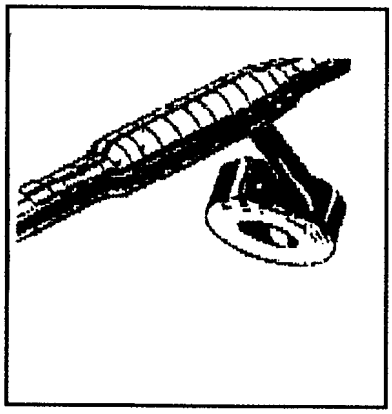

FAST, EASY, SIMPLE, COST EFFECTIVE

☺ STRONG ☺ PERMANENT ☺ DURABLE

☺FLEXABLE ☺ CORROSION RESISTANT ☺ WITHSTANDS 257°

☺WITHSTANDS 350 psi ☺ -40° WITHOUT CRACKING ☺ CABLES UP TO 36, 000 VOLTS

☺ FOR JOINTING (SPLICING) A WIDE RANGE OF POWER AND DISTRIBUTION

799-635 (G/D)

Typical Applications:

*Telecommunications	*Outdoor lighting	*Trailers	*Traffic controls
*Marine	*Aviation	*Appearance	*Generator equip.
*Automotive	* Pumps	*Utilities	*Agricultural equip.
*Mining	*Refrigeration equip.	*Air conditioning	*Vibration

© 1996 OEM HARDWARE
1-800-663-6554
DIV OF STOCKTON INDUSTRIES INC.

O.E.M HARDWARE

"Hard to Find Fasteners Our Specialty"™

#103-12779-80TH AVE. SURREY, B.C. V3W-3A6 PH.(604)591-1100 FAX (604)591-8133

SOLD TO:

SHIP TO:

C.O.D	PAGE #	#OF PAGES TO ORDER	ORDER DATE

P.O.#	BUYERS NAME

ACCT.#	PHONE #

EMAIL ADDRESS	FAX #

P.S.T #	AGENTS NAME	AGENT CODE	ZONE

	ORDER	PART #	DESCRIPTION	PRICE	PER	AMOUNT
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						
11						
12						

☐ TOTAL LINES

☐ New

☐ ESTABLISHED

NO RETURN GOODS ACCEPTED WITHOUT WRITTEN PERMISSION.
CLAIMS FOR SHORTAGES OR DAMAGED GOODS ONLY WITHIN 48 HOURS.

BUYER'S SIGNATURE X

NAME OF CARRIER.

SUBTOTAL	
G.S.T	
P.S.T	
SHIPPING	
TOTAL	

☐ VISA ☐ MC **CARD#** _____

CARD HOLDER _____ **EXP.** _____